



PolySto PVC Skirting - PV15F

- Hygienic protection of wall panels in the food industry
- Protection against water infiltration to the wall panels
- Avoidance of hollow spaces that can contain bacteria
- Skirting of the wall/floor and wall/kerb junction


Application: food production rooms, catering, industrial kitchens, restaurants, supermarkets, cold rooms, clean rooms, behind machinery, sanitary rooms, washing rooms,...

Food safe Sealant or bi-component Hygiseal RAL 9002

Full core PVC (unleaded)

Skirting to wall-floor function according EU-requirements

Food safe Sealant or bi-component Hygiseal RAL 9002

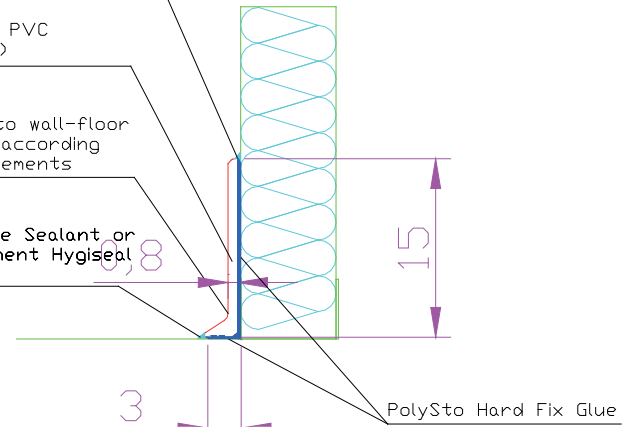

Specification

PolySto PV15F skirting is a prefabricated full core covered skirting 2000x150x30mmH with sloped top and skirting to wall-floor according the EU-requirements. The PV15F skirting consists of a non toxic unleaded PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant or 2-component Hygiseal.

Technical information


	Skirting	Inner corner	External corner
Length	200 cm	15 cm / 15 cm	15 cm / 15 cm
Height	15 cm	15 cm	15 cm
Thickness middle	0,8 cm	0,8 cm	0,8 cm
Thickness feet	3 cm	3 cm	3 cm
Weight	4 kg	0,5 kg	0,5 kg

Consumption


Option 1: Sealant white	150 cc / m
Sealant transparent	115 cc / m
Option 2: Hygiseal white	100 cc / m
Hard Fix Glue	220 cc / m
Installation pegs	4 pc / m

Packing pallet


Dimensions	200x100x70cmH
Number of meters / pallet	250 pieces / 500 meter
Weight	1000 kg

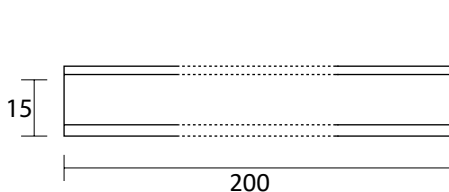

Skirting



Inner corner



External corner