

PolySto PVC Skirting - PVFCF

- Hygienic protection of wall panels in the food industry
- Protection against water infiltration to the wall panels
- Avoidance of hollow spaces that can contain bacteria
- Skirting of the wall/floor and wall/kerb junction


Application: food production rooms, catering, industrial kitchens, restaurants, supermarkets, cold rooms, clean rooms, behind machinery, sanitary rooms, washing rooms,...

PolySto Food Safe Sealant or 2-component Hygiseal white

Full core PVC

Skirting to wall-floor function according EU-requirements

PolySto Food Safe Sealant or 2-component Hygiseal

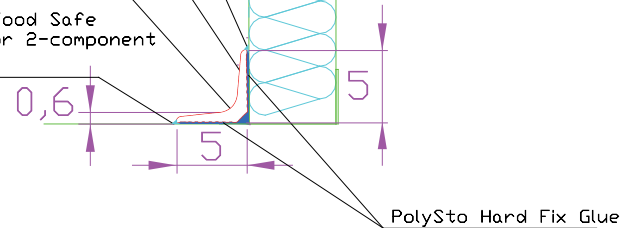

Specification

PolySto PVFCF skirting is a prefabricated full core covered skirting 2000x50x50mmH with sloped top and skirting to wall-floor according the EU-requirements. The PVFCF skirting consists of a non toxic unleaded PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant or 2-component Hygiseal.

Technical information

	<u>Skirting</u>
Length	200 cm
Height	5 cm
Thickness middle	0,6 cm
Thickness feet	5 cm
Weight	1,5 kg

Consumption

Option 1: Sealant white	150 cc / m
Sealant transparent	115 cc / m
Option 2: Hygiseal white	100 cc / m
Hard Fix Glue	220 cc / m
Installation pegs	4 pc / m

Packing pallet

Dimensions	200x100x70cmH
Number of meters / pallet	500 pieces / 1000 meter
Weight	750 kg

